

ISUZU 'FORWARD' N62.150 6.2T GVW


(EASYSHIFT TRANSMISSION) 4X2 RIGID CHASSIS WITH DAY OR CREWCAB
EURO 4

STANDARD VEHICLE PLATED WEIGHTS

GVW 6200KG
GTW 8250KG
GTW Optional 9700KG*

AXLE DESIGN WEIGHTS

Front 2800KG
Rear 4600KG

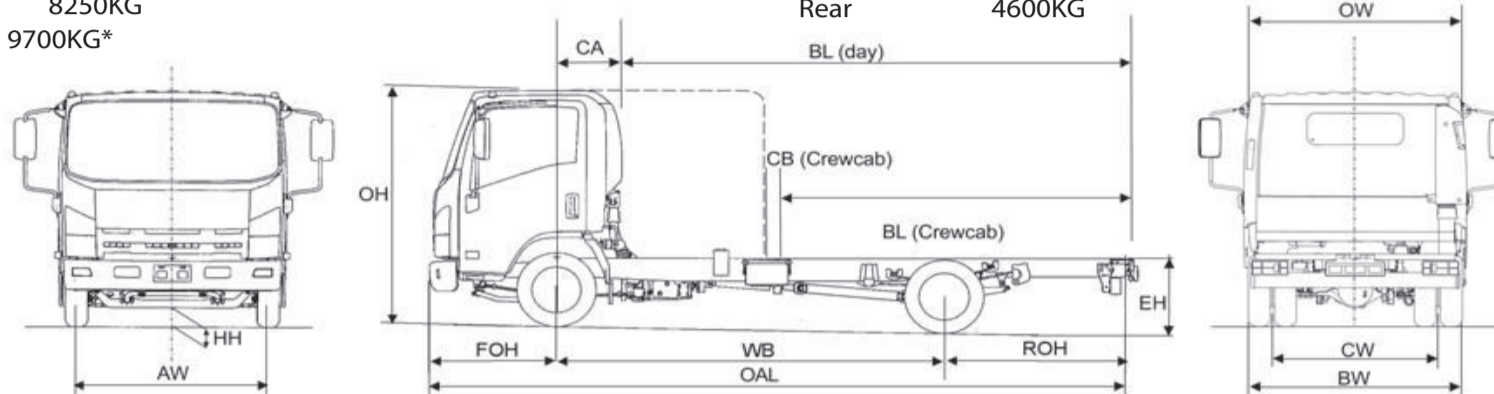

WEIGHTS (KG)

CAB TYPE

WHEELBASE (WB)

		day	day	crewcab
		3395	3845	3395
Vehicle Mass Unladen	Front	1585	1595	1740
	Rear	755	795	865
Total		2340	2390	2605
GVW		6200	6200	6200
Max. Permissible Trailer Weight		2050/3500*	2050/3500*	2050/3500*
Body & Payload Allowance		3860	3810	3595

DIMENSIONS (mm)

Overall Length	OAL	6095	6745	6095
Overhang	Front FOH	1110	1110	1110
	Rear ROH	1590	1790	1590
Cab Gap	CB	157	157	70
C/L Front Axle to Rear of Cab	CA	573	573	1574
Recommended Body Length	BL	4267	4876	3251
Chassis Frame Width		750	750	750
Recommended Body Width		2286	2286	2286
Recommended Maximum Body Width		2387	2387	2387
Cab Width	OW	2040	2040	2040
Overall Height (Unladen)	OH	2265	2265	2260
Chassis Height (Unladen)	EH	800	800	800
Minimum Road Clearance	HH	210	210	210
Track	Front AW	1680	1680	1680
	Rear CW	1650	1650	1650
Rear Axle Width	BW	2129	2129	2129

N62.150(CE)/0808/GW/3K

* Driver licence and tachograph regulations apply.

- Unladen weights exclude fuel, driver, spare wheel + carrier, tool kit and jack. (Tolerance +/- 3%).
- Body lengths are given as a guide only. Bodybuilders are responsible for ensuring all legal requirements are met.
- Maximum body lengths are calculated to remain within the maximum permitted overhang in the UK of 60% of the wheelbase. Cab gaps may vary.
- Isuzu Truck (UK) Ltd. shall have no liability whatsoever should the information supplied have incorrect data, descriptions or illustrations.

ISUZU
BUILT AROUND U


ISUZU 'FORWARD' N62.150 6.2T GVW

(EASYSHIFT TRANSMISSION) 4X2 RIGID CHASSIS WITH DAY OR CREWCAB
EURO 4

N62.150 6.2T

Mechanical Specification

(standard equipment)

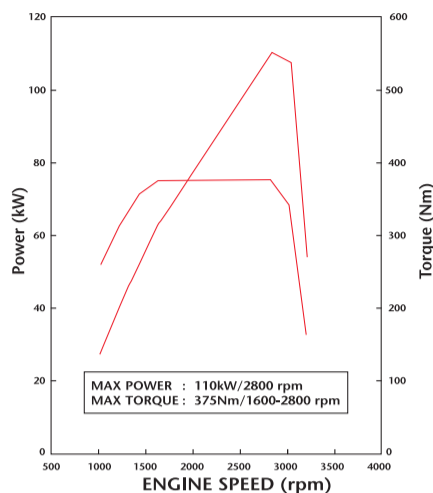

Engine 4JJ1TC

- Isuzu turbo intercooled 4 cylinder diesel DOHC (Euro 4)
- Bore: 95.4mm
- Stroke: 104.9mm
- Capacity: 2999cc
- Max Power: 110kW at 2800rpm (150bhp)
- Max Torque: 375Nm between 1600-2800rpm
- Injection Type: Common rail
- Euro 4 Compliance: EGR- (Exhaust Gas Recirculation) with DPD (Diesel Particulate Defuser)

Fuel Tank

Capacity: 100 litres

Electro Hydraulic

Controlled Transmission

- 6 speed MYY6S with fully automatic and sequential shift modes
- Ratios:

1st	5.979
2nd	3.434
3rd	1.862
4th	1.297
5th	1.000
6th	0.759
Reverse	5.701
- Rear Axle Ratio: 4.555:1
- Tyres: 215/75 17.5 radial, spare wheel and carrier
- Wheels: Dual rear wheels 6.00J x 17.5, 6-stud

Cab Exterior

- New aerodynamic Isuzu Hexapod design white all steel cab with roof outline markers

- Manual tilt to 45 deg. day cab – semi fixed crew cab
- Chrome radiator grille
- Laminated windscreen
- Plastic resin non-slip entry steps
- 90 deg. opening cab doors
- Zinc galvanised cab frame structure
- Steel reinforced composite front bumper with fog lights
- 2 flush mounted halogen headlamps with indicators
- Front tyre mud guards with spray suppression
- Keyless door entry and immobiliser

Frame

Parallel ladder type channel section straight side rails, riveted upper flange

Cooling

Radiator: Tube and fin type with fan and viscous clutch

Clutch

Fluid hydrokinetic coupling with lock up clutch

Cab Interior

- Flame resistant interior trim
- Vinyl floor matting
- Pillar mounted entrance grab handles both sides
- SRS airbags driver and passenger

Seats (all cloth)

- Driver's fully adjustable suspension seat with head restraint
- Dual passenger seat, folding back centre with tray
- Driver and outer passenger retractable diagonal seat belts, with pre-tensioner
- Centre seat lap belt
- 4-seat passenger (crew cab) with lap belts

Vision

- Large foldable mirrors
- Interior rear view mirror on collapsible mounting
- Driver and passenger sun visors
- Deep cut side windows to reduce blind spots
- Electric windows with driver control and lock

Heating & Ventilation

- 4-speed blower
- Multiple cab vents

Axles

Front: Reverse Elliott I-Beam
Rear: Banjo fully floating

Suspension

Front: Semi-elliptical alloy steel leaf springs with hydraulic shock absorbers and anti roll bar
Rear: Semi-elliptical alloy steel leaf springs with hydraulic shock absorbers and anti roll bar

Steering

- Recirculating ball type with full integral hydraulic power assistance
- Tilt and telescopic steering column

Brakes

System: ABS divided hydraulic, brake booster assisted with electronic brake distribution and anti slip regulation
Front: 293mm ventilated discs with asbestos free pads
Rear: 293mm ventilated discs with asbestos free pads
Park: mechanical drum brake rear of transmission

Instruments

- Rev counter
- Tachograph, Digital Siemens VDO
- Speedometer with odometer & trip
- Gauges: Fuel level and coolant temperature
- Gear selected

Switches & Electrical

- Electronic vehicle speed limiter set at 56mph (90kph)
- Steering column mounted combination switch for indicators, headlamps (high, main and side), front and rear fog lamps

- Wiper and washer (2-speed and intermittent)
- Exhaust brake
- Brake warning buzzer
- Steering wheel horn switch
- Hazard lights
- Head lamp levelling
- Interior light
- Key operation for quick cold start, start and stop
- Engine quick warm up
- Cigarette lighter
- Central locking
- Reverse warning buzzer in cab
- ASR off/on
- DPD engage
- Fast engine idle

Warning Lamps

- Battery charge
- Oil pressure
- Check brake system
- Low fuel
- Glow plug operation
- High beam indicators
- Parking brake on
- Exhaust brake operation
- Fuel/water separator
- Check engine
- ABS warning
- DPD engaged/warning,
- Service warning
- ASR off/on
- OBD
- Front and rear fog lamps
- Brake booster

Tool Kit

5000kg jack, with a small selection of hand tools

Radio

RDS Radio/CD Player package

Storage Space

- Compartment box
- Centre console tray
- Door pockets
- Centre facia pocket
- Pop out type cup holder
- Overhead roof shelves
- Storage bin (behind seats)
- Card holder

Ancillaries

Starter: Reduction type 24 V – 4.0 kW
Alternator: 24 V – 50 Amp
Quick Start: 4-glow plugs on start relay
Battery: 2 x 12 V 75AH (maintenance free)

The following optional items are available:

- Chrome Wheel Trims
- Isuzu Branded Mats
- Aerodynamic Body Kits
- Satellite Navigation
- Reversing Aids
- Wheelbase Extensions/Reduction
- Air Suspension
- PTO Switch

For further information please contact your local dealer, ring us directly on
01707 28 29 30

or visit our website

www.isuzutruck.co.uk

ISUZU TRUCK (UK) LTD,
ISUZU HOUSE,
164 GREAT NORTH ROAD,
HATFIELD,
HERTFORDSHIRE AL9 5JN

ISUZU
BUILT AROUND U